




RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	051005	PC
2	Solder Hole added	112320	PC



STRIP LENGTHS
RG405 - .086"



RECOMMENDED
MOUNTING HOLE

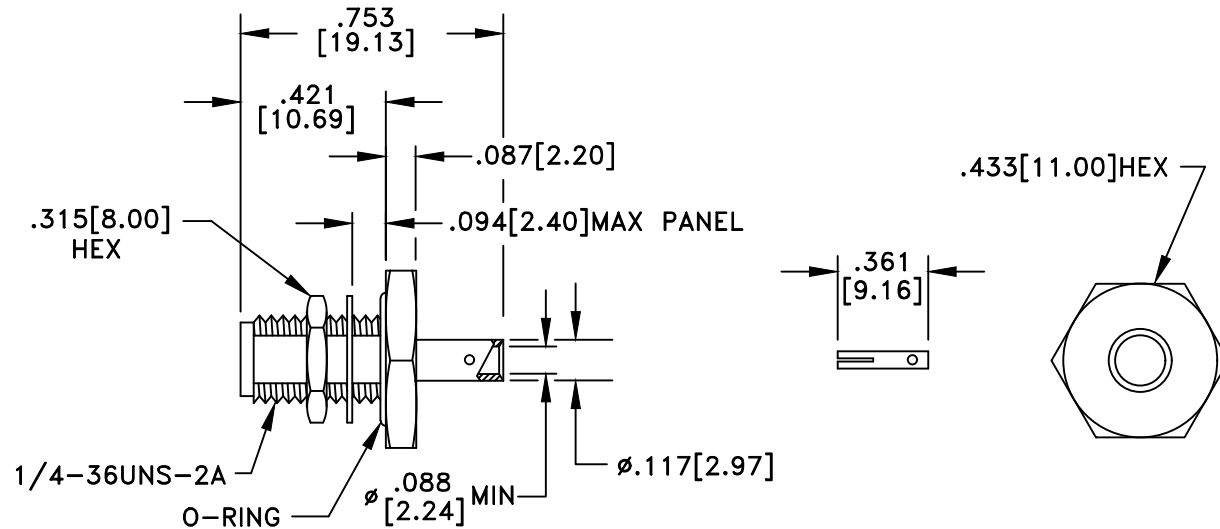

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
O-RING	SILICONE RUBBER

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			SMA FEMALE BULKHEAD SOLDER CABLE END for .086" SEMI-RIGID		
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MWA-6051-AG-086	TITLE MWA-6051-AG-086	
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 2 DATE 020605 Scale NONE Sheet 1 of 1