



RevNo	Revision note	Date	Checked
1	RoHS Compliant	071005	PC



STRIP LENGTH
M17/133-RG405

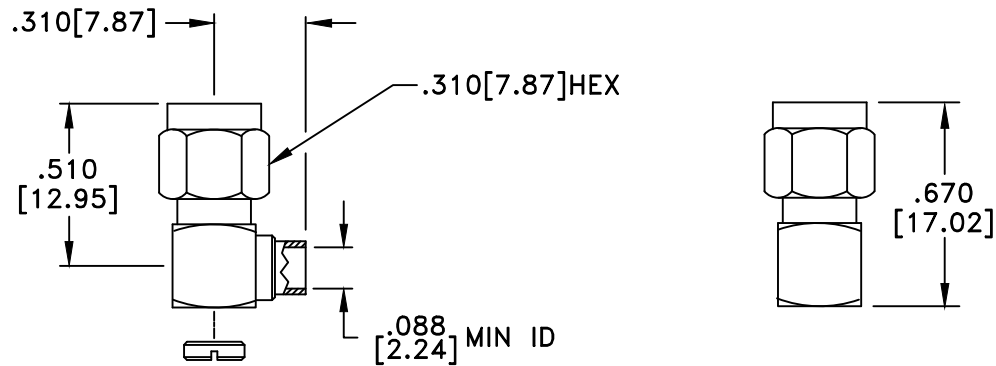

RoHS Compliant

NOTE: CONTACT CAPTIVATED

MATERIAL	
BODY	BRASS
BODY PLATING	GOLD
PIN	BRASS
PIN PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
RETAINING RING	BERYLLIUM COPPER
GASKET	SILICONE RUBBER
SCREW CAP	BRASS
SCREW CAP PLATING	GOLD
50 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			SMA MALE R/A SOLDER CABLE END for .086 SEMI-RIGID			
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWA-8001-G-086	TITLE MWA-8001-G-086		
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 DO NOT SCALE THIS DRAWING			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 1 DATE 061101	SCALE NONE SHEET 1 of 1