


STRIP LENGTH  
M17/130-RG402

RevNo	Revision note	Date	Checked
1	RoHS Compliant	051005	PC

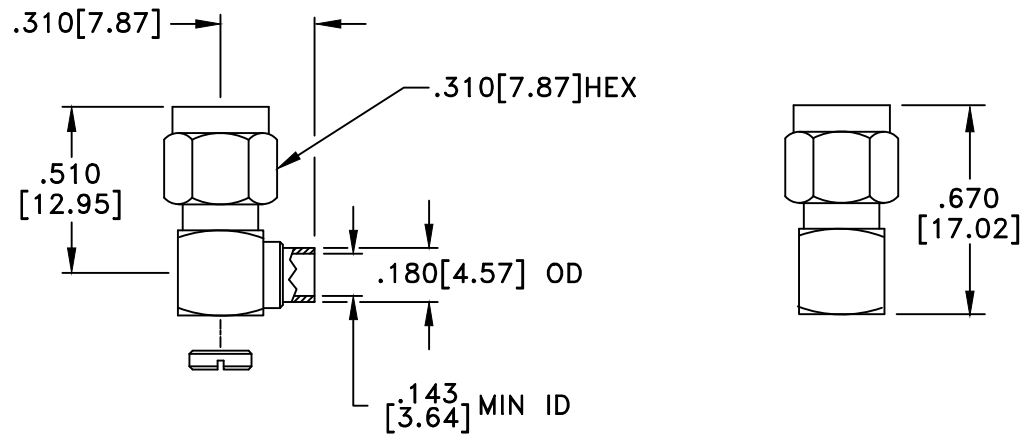

RoHS Compliant

### MATERIAL

BODY	BRASS
BODY PLATING	GOLD
PIN	BRASS
PIN PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
RETAINING RING	BERYLLIUM COPPER
GASKET	SILICONE RUBBER
SCREW CAP	BRASS
SCREW CAP PLATING	GOLD

50 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES  
6501 W. FRYE ROAD, #23  
CHANDLER, AZ 85226

SMA MALE R/A SOLDER  
CABLE END for  
.141 SEMI-RIGID

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWA-8001-G-141	TITLE MWA-8001-G-141
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 DO NOT SCALE THIS DRAWING				ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.
				REV. 1 DATE 061101
				SCALE NONE SHEET 1 of 1