




STRIP LENGTHS
RD316

RevNo	Revision Notes	Date	Checked
1	Ferrule ID Changed to .125"; Part Description Clarified	080201	G.C.
2	Overall dimension change	121102	P.C.
3	Overall Length changed	081204	P.C.
4	RoHS Compliant	081304	P.C.

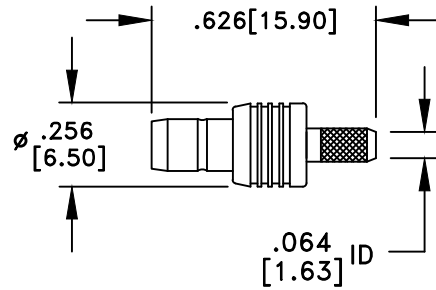

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
FERRULE	BRASS
FERRULE PLATING	NICKEL

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

SMB MALE CRIMP CABLE END
for RD316

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWB-6001-G-D316	TITLE MWB-6001-G-D316
------------------------	------------------------	-----------------------	------------------------------	--------------------------

TOLERANCES
DIMENSIONS ARE IN INCHES UNLESS
OTHERWISE SPECIFIED
DECIMALS ANGULAR
.XX ± .02 ± .06
.XXX ± .005 DO NOT SCALE THIS DRAWING

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE
PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

REV. 4	Scale NONE
DATE 042901	Sheet 1 of 1