


STRIP LENGTHS
M17/113-RG316

RevNo	Revision Notes	Date	Checked
1	Ferrule ID Changed to .125"; Part Description Clarified	080201	G.C.
2	Overall dimension change	121102	P.C.
3	RoHS Compliant	052005	P.C.
4	Overall length revised	020909	P.C.

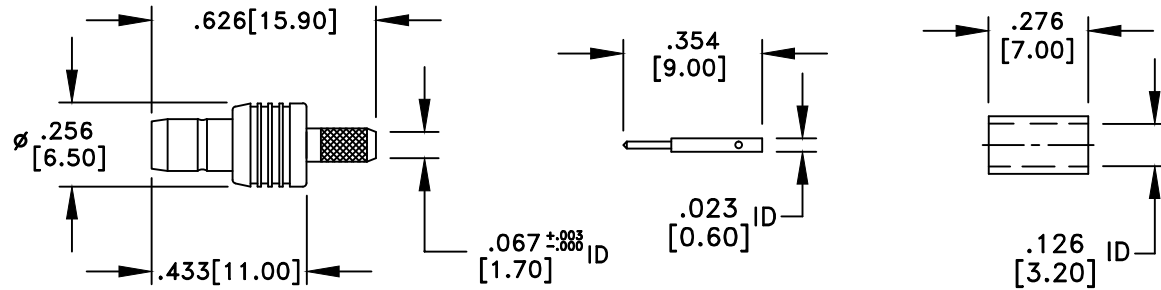

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
FERRULE	BRASS
FERRULE PLATING	NICKEL

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE RD. #15
CHANDLER, AZ 85226

SMB MALE CRIMP CABLE END
for RG-316

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWB-6001G-316	TITLE MWB-6001G-316
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 ± .01 DO NOT SCALE THIS DRAWING		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 4 DATE 042901 Scale NONE Sheet 1 of 1