


STRIP LENGTHS  
M17/113-RG316

RevNo	Revision Notes	Date	Checked
1	Ferrule OD Changed	020202	A.L.
2	RoHS Compliant	050206	PC

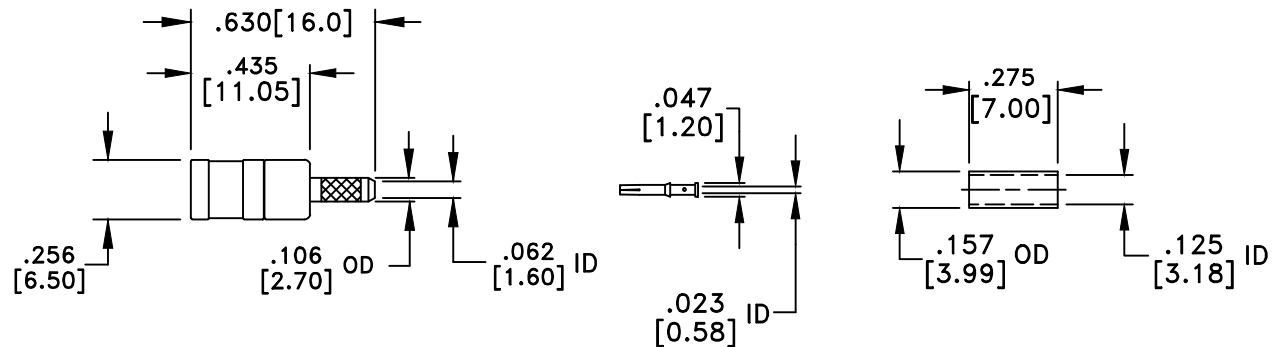

RoHS Compliant

**MATERIAL**

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
FERRULE	BRASS
FERRULE PLATING	GOLD

50 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES  
6501 W. FRYE ROAD, #23  
CHANDLER, AZ 85226

SMB PLUG CRIMP/SOLDER  
CABLE END for RG316

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWB-6012-AG-316	TITLE MWB-6012-AG-316
<p><b>TOLERANCES</b> DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS            ANGULAR .XX ± .02            ± .06 .XXX ± .005        ± .01 DO NOT SCALE THIS DRAWING</p>			<p>ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.</p>	
			REV. 2	Scale NONE
			DATE 021001	Sheet 1 of 1