


RevNo	Revision Notes	Date	Checked
1	Ferrule OD Changed	020202	A.L.
2	RoHS Compliant	050206	PC

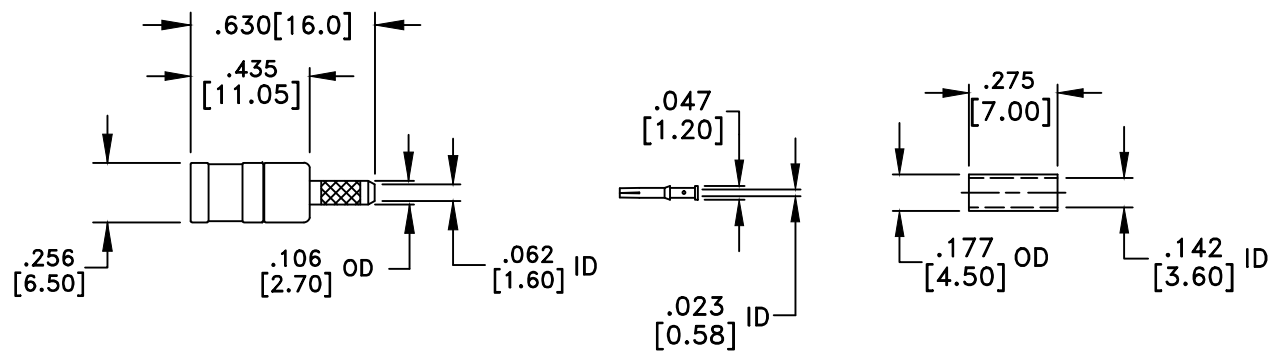

RoHS Compliant

MATERIAL	
BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
FERRULE	BRASS
FERRULE PLATING	GOLD
50 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		SMB PLUG CRIMP/SOLDER CABLE END for RD316	
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWB-6012-AGD316
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 DO NOT SCALE THIS DRAWING		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
		REV. 2	Scale NONE
		DATE 021001	Sheet 1 of 1
TITLE MWB-6012-AGD316			