



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	052005	GC



RECOMMENDED
STRIP LENGTHS

.086" 75 OHM

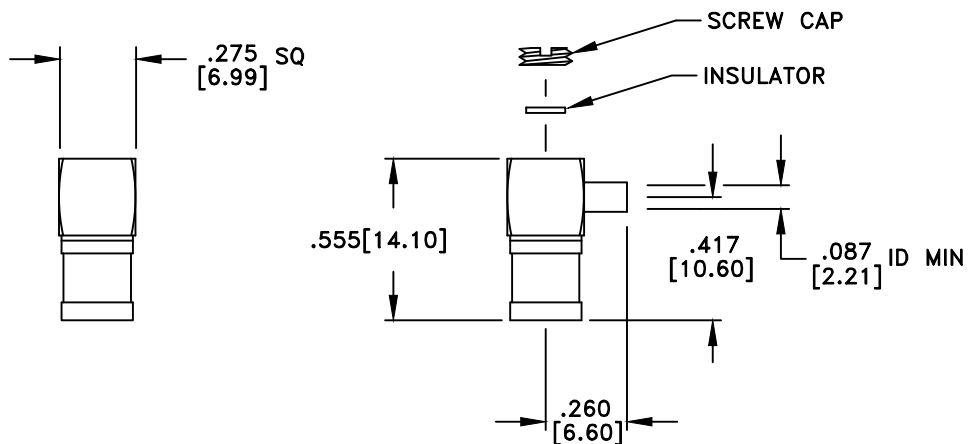

RoHS Compliant

MATERIAL	
BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
75 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			SMB FEMALE RIGHT ANGLE CRIMP CABLE END for .086" 75 Ohm			
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWB-6018-G-08675	TITLE MWB-6018-G-08675		
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 ± .01 DO NOT SCALE THIS DRAWING			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 1 DATE 052005	Scale NONE Sheet 1 of 1