



RevNo	Revision Notes	Date	Checked
1	Shank to Interface changed to .410"	012804	PC
2	Ferrule Length Changed; RoHS Compliant	062605	PC
3	Shank ID changed to .067"	022306	GC



RECOMMENDED
STRIP LENGTHS
RD316

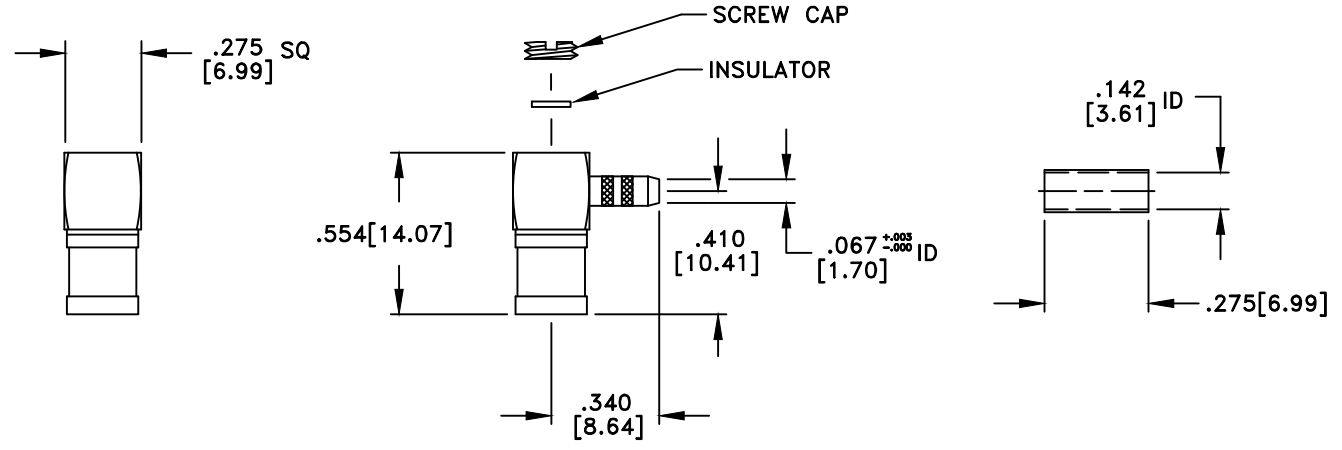

RoHS Compliant

MATERIAL	
BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
50 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		SMB FEMALE PLUG RIGHT ANGLE CRIMP CABLE END for RD316 50 Ohm	
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWB-6018-G-D316
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 DO NOT SCALE THIS DRAWING		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
		REV. 3	Scale NONE
		DATE 040101	Sheet 1 of 1
		TITLE MWB-6018-G-D316	