



| RevNo | Revision Notes | Date | Checked |
|-------|--|--------|---------|
| 1 | Width changed; Shank ID Increased to .064" | 061803 | P.C. |



STRIP LENGTHS
M17/113-RG316

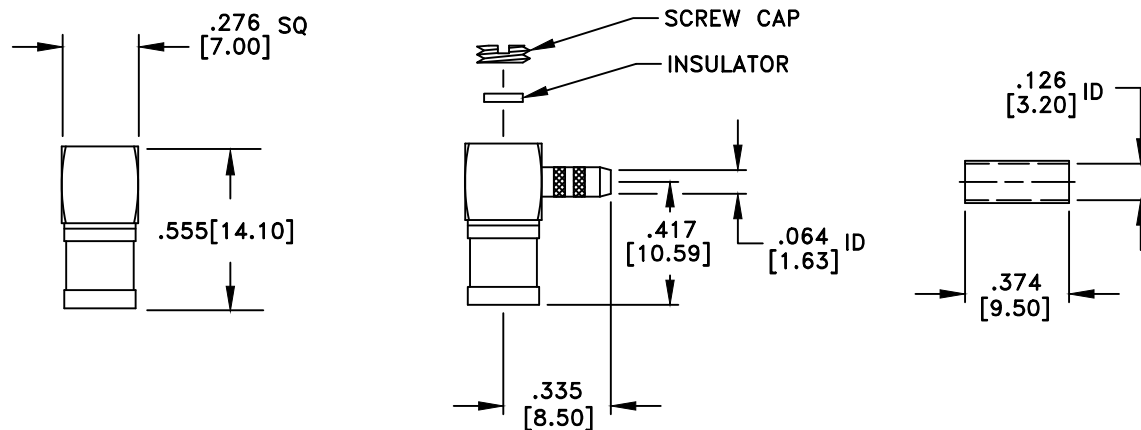

RoHS Compliant

MATERIALS

| | |
|-----------------|------------------|
| BODY | BRASS |
| BODY PLATING | GOLD |
| CONTACT | BERYLLIUM COPPER |
| CONTACT PLATING | GOLD |
| DIELECTRIC | TEFLON (PTFE) |
| FERRULE | BRASS |
| FERRULE PLATING | GOLD |

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

| | | | | | |
|--|------------------------|-----------------------|---|--------------------------|---|
| MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226 | | | SMB FEMALE RIGHT ANGLE CRIMP/SOLDER CABLE END for RG316 | | |
| Designed by N. JAIN | Checked by W. CANON | Approved by A. LEE | File name MWB-6018B-G-316 | TITLE MWB-6018B-G-316 | |
| TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 | | | ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE. | | REV. 1 DATE 061603 Scale NONE Sheet 1 of 1 |