





RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	120611	GC
2	Hex Nut corrected to reflect standard 6.35mm	121411	GC

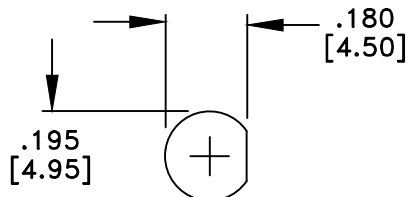

RECOMMENDED MOUNTING HOLE



FRONT VIEW

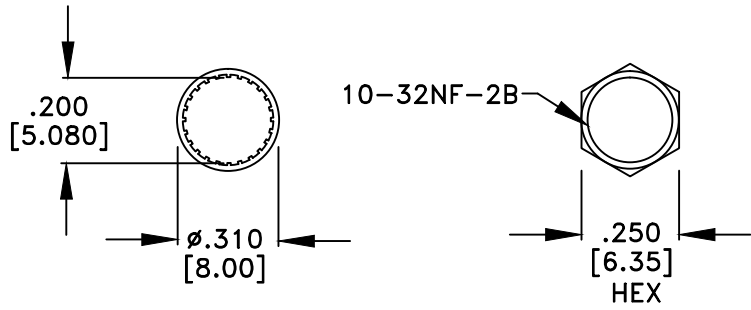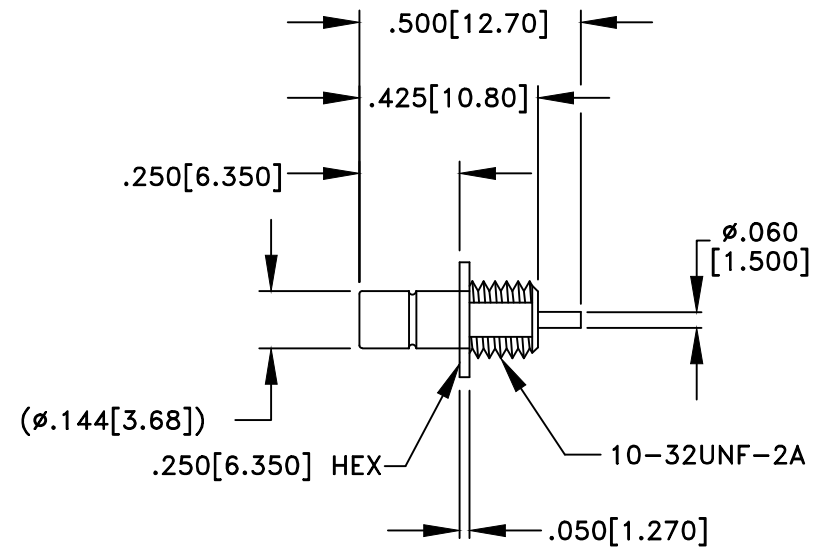

MATERIAL	
BODY	BRASS
BODY PLATING	GOLD
PIN	BRASS
PIN PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			SMB MALE BULKHEAD MOUNT 50 OHMS			
Designed by N. JAIN	Checked by W. CANON	Approved by K. WILSON	File name MWB-6019-GA-50	TITLE MWB-6019-GA-50		
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 DO NOT SCALE THIS DRAWING			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 2 DATE 031801	Scale NONE Sheet 1 of 1