



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	052005	GC

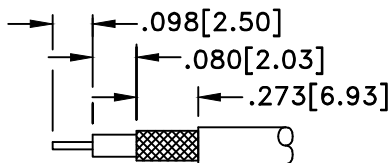

STRIP LENGTHS
M17/113-RG316

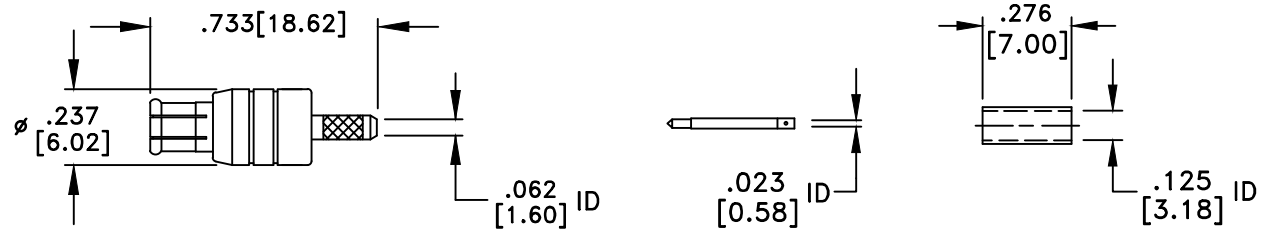

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
FERRULE	BRASS
FERRULE PLATING	GOLD

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

MCX PLUG CRIMP/SOLDER
CABLE END for RG316

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWX-6001G-316	TITLE MWX-6001G-316	
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS .XX ± .02 .XXX ± .005		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 1 DATE 072501	Scale NONE Sheet 1 of 1