



RevNo	Revision Notes	Date	Check
1	Ferrule ID Changed to .142"	080101	G.C.
2	Overall dimensions changed	091803	G.C.
3	RoHS Compliant; Ferrule ID Changed	061605	PC
4	Shank ID Called out	122005	GC

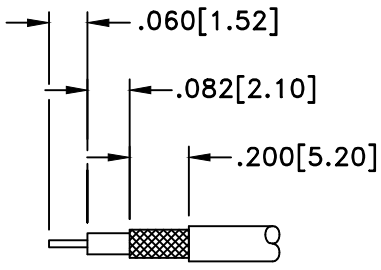

STRIP LENGTHS
RD179

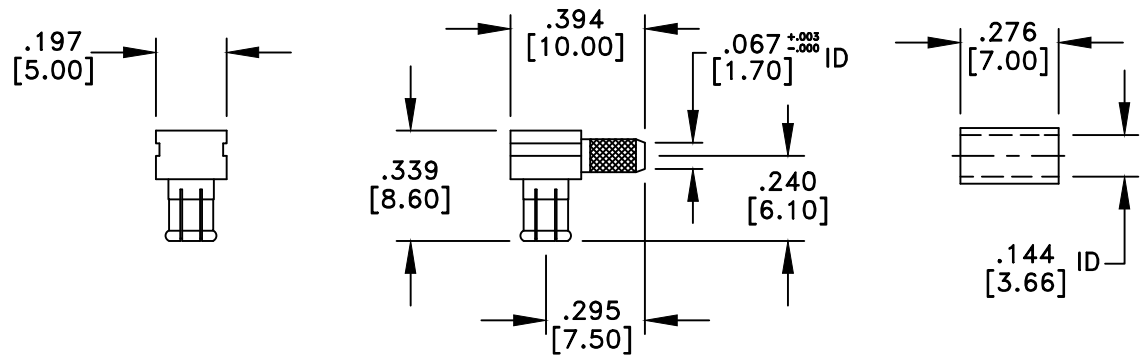

RoHS Compliant

MATERIAL	
BODY	BRASS
BODY PLATING	GOLD
PIN	BRASS
PIN PLATING	30u" GOLD OVER NICKEL
DIELECTRIC	TEFLON (PTFE)
FERRULE	BRASS
FERRULE PLATING	GOLD
SCREW CAP	BRASS
SCREW CAP PLATING	GOLD

75 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226	MCX MALE RIGHT ANGLE CABLE END for RD179
--	---

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWX-8001-G-D179	TITLE MWX-8001-G-D179
------------------------	------------------------	-----------------------	------------------------------	--------------------------

TOLERANCES
DIMENSIONS ARE IN INCHES UNLESS
OTHERWISE SPECIFIED
DECIMALS ANGULAR
.XX ± .02 ± .06
.XXX ± .005 ± .01
DO NOT SCALE THIS DRAWING

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE
PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

REV. 4	Scale NONE
DATE 071001	Sheet 1 of 1