


RevNo	Revision Notes	Date	Checked
1	Initial Release	05/23/10	PC






STRIP LENGTHS

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
SOLDER SHANK PLATING	GOLD
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
RETAINING RING	BERYLLIUM COPPER
GASKET	SILICONE RUBBER

FREQUENCY RANGE: DC-40 GHz
 50 Ohm IMPEDANCE
 500V PEAK VOLTAGE RATING
 TEMPERATURE RANGE: -55°C TO +155°C
 INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

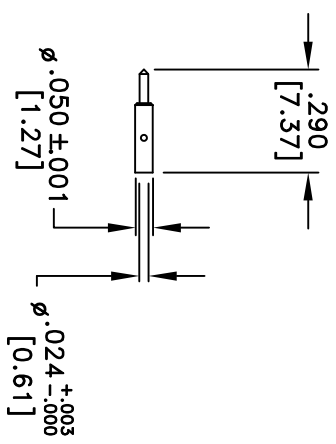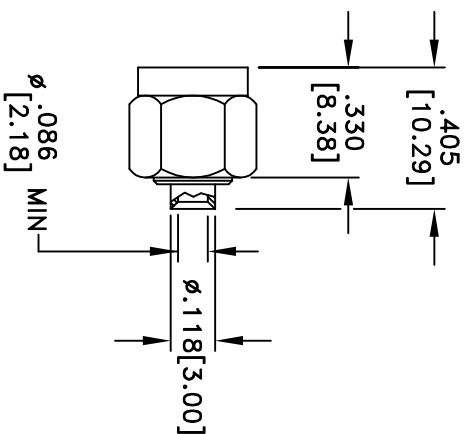

MILLIMETER WAVE TECHNOLOGIES
 6501 W. FRYE ROAD, #23
 CHANDLER, AZ 85226

2.9mm PLUG
 SOLDER CABLE END
 for .086" SEMI-RIGID

Designed by N. JAIN	Checked by S. NEUGEISS	Approved by A. LEE	File name MWK-6001-g-086	TITLE MWK-6001-G-086	REV. 1	Scale NONE
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS .XX ± .02 ANGULAR .XXX ± .005				ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		
				DATE 05/23/10	Sheet 1 of 1	