
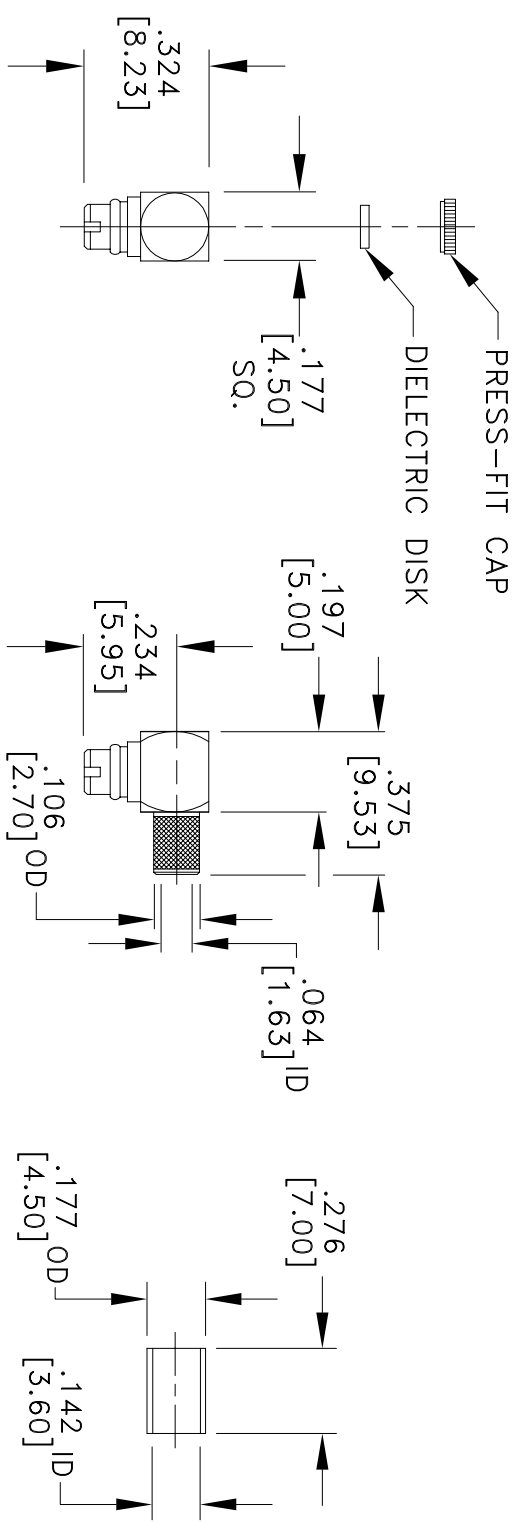


RevNo	Revision note	Date	Checked
1	Initial Release	022015	GC

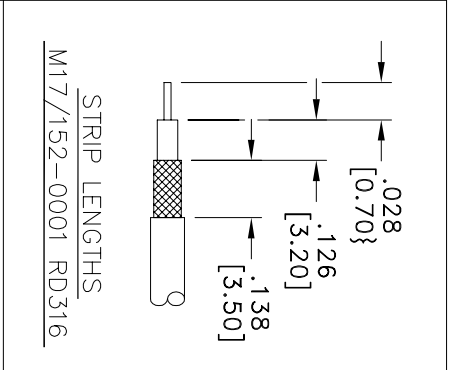

RoHS Compliant

MATERIAL	
BODY	BRASS/BeCu
BODY PLATING	GOLD
CONTACT	BeCu
CONTACT PLATING	GOLD
DIELECTRIC (X2)	TEFLON (PTFE)
CAP	BRASS
CAP PLATING	GOLD

50 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES  
6501 W. FRYE ROAD, #23  
CHANDLER, AZ 85226

SMP FEMALE RIGHT ANGLE  
SOLDER CABLE END  
for RD316

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWP-8001-G-D316	TITLE MWP-8001-G-D316
<p>TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ± .02 ANGULAR ± .06 XXX ± .005 DO NOT SCALE THIS DRAWING</p>				
<p>ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.</p>				
REV. 1	Scale NONE			
DATE 022015	Sheet 1 of 1			