



RevNo	Revision Notes	Date	Checked
1	Initial Release	042505	PC

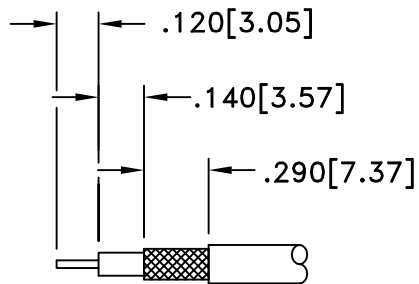

STRIP LENGTHS  
RD316

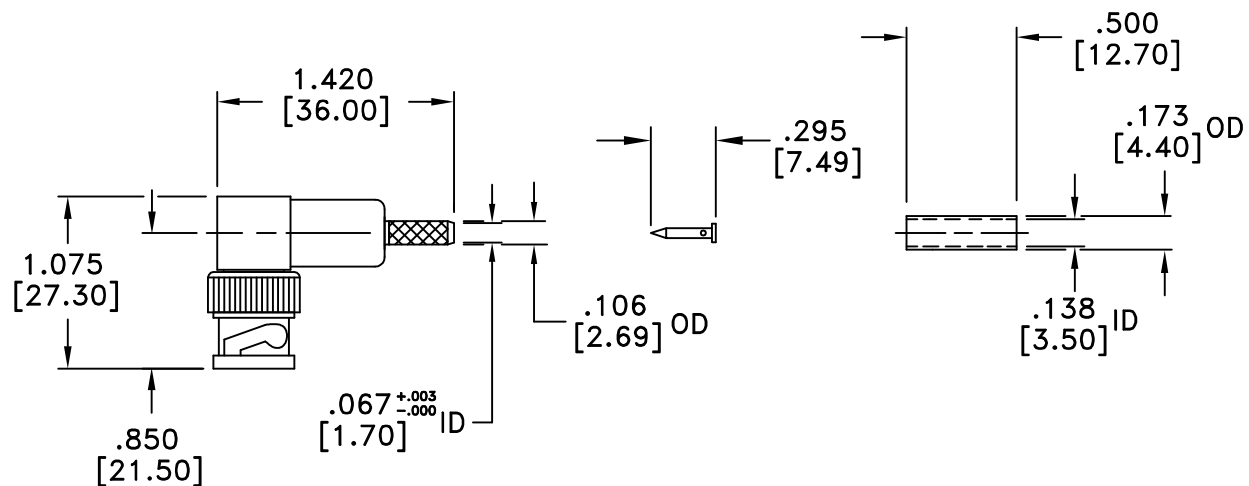

RoHS Compliant

**MATERIALS**

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES  
6501 W. FRYE ROAD, #23  
CHANDLER, AZ 85226

BNC MALE R/A  
CRIMP CABLE END  
for RD316

Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-266R-D316	TITLE MW-266R-D316
<p><b>TOLERANCES</b> DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005</p>				<p>ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.</p>
			REV. 1	Scale NONE
			DATE 042505	Sheet 1 of 1