
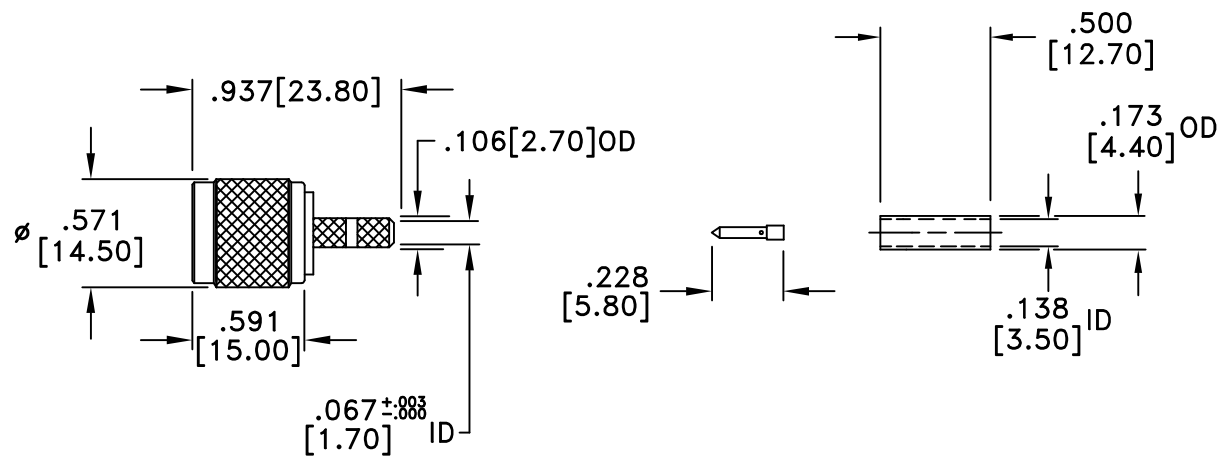


RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	081205	PC

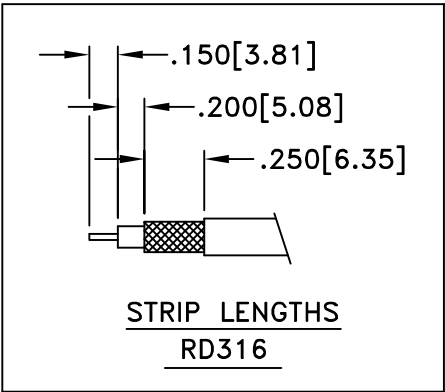

RoHS Compliant

MATERIALS	
BODY	BRASS
BODY PLATING	NICKEL
CENTER PIN	PHOSPHOR BRONZE
CENTER PIN PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
BULLET PIN	BRASS
GASKET	SILICONE
50 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

NOTE: FEMALE CONTACT IS BUILT-IN

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			TNC REVERSE POLARITY PLUG (FEMALE CONTACT) CRIMP TYPE for RD316			
Designed by N. JAIN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-750-RP-D316	TITLE MW-750-RP-D316		
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 1 DATE 032102	Scale NONE Sheet 1 of 1