



RECOMENDED MOUNTING HOLE

RevNo	Revision Notes	Date	Checked
1	Contact length increased by 1mm	110501	A.L.
2	Barrel and overall length increased by .025"	0524.04	GC
3	RoHS Compliant	051905	PC

ACCEPTS MALE PIN  
 $\varnothing.020[0.50] - .047[1.19]$

$.430[10.92]$ HEX

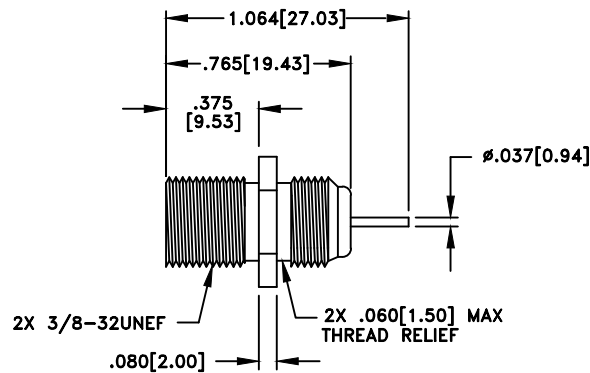

RoHS Compliant

**MATERIALS**

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BeCu/BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON
O-RING	VITON

75 Ohm IMPEDANCE  
 500V PEAK VOLTAGE RATING  
 TEMPERATURE RANGE: -55°C TO +155°C  
 INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

NOTES: O-RING INCLUDED

MILLIMETER WAVE TECHNOLOGIES  
 6501 W. FRYE ROAD, #23  
 CHANDLER, AZ 85226

F FEMALE BULKHEAD MOUNT  
 WATER RESISTANT  
 H/P 75 OHMS

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MW-810-75	TITLE MW-810-75
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS .XX ± .02 .XXX ± .005		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 3 DATE 032201
				Scale NONE Sheet 1 of 1