


RevNo	Revision note	Date	Checked
1	Initial Release	112015	GC
2	5.00" Part added	042016	GC

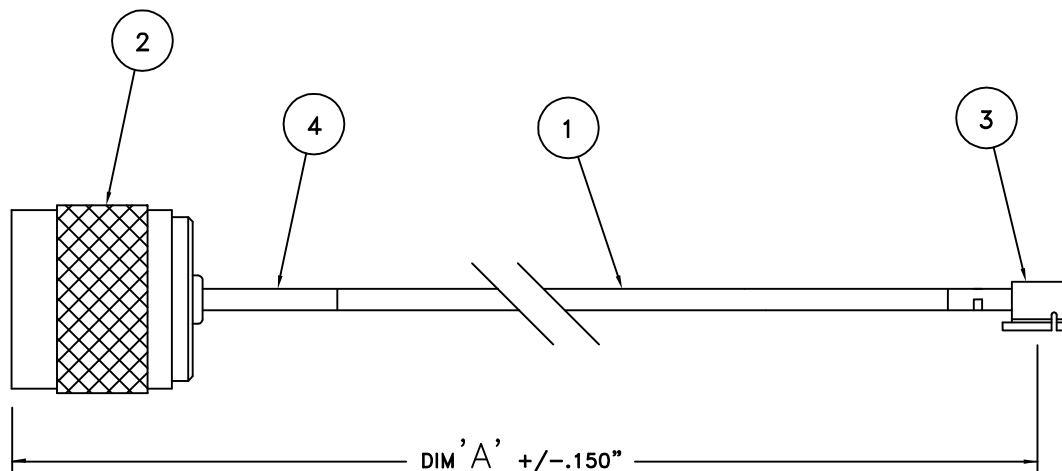

NOTES:

1. STRIP CABLE ENDS IN ACCORDANCE WITH CONNECTOR SPEC SHEETS.
2. CONSTRUCT CABLE ASSEMBLY IN ACCORDANCE WITH PROCEDURES.
3. TAG WITH PART NUMBER, QUANTITY, AND CUSTOMER PART NUMBER.
4. NOTE CONNECTOR ALIGNMENTS
5. MUST USE RoHS COMPLIANT MATERIALS

PART NO.	DIM "A"	
	INCHES	MILLIMETERS
MWAS-2294-5.00	5.00	127.00
MWAS-2294-7.00	7.00	177.80
MWAS-2294-11.50	11.50	292.10

MATERIALS

- 1 COAXIAL CABLE, M17/169-00001 RG178
- 2 MW-350-178, N PLUG for RG178
- 3 U.FL PLUG, HIROSE U.FL-LP-066 for RG178 Cable
- 4 SHRINKTUBE, BLACK 1/8" POLYOLEFIN

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

CABLE ASSEMBLY
N PLUG – U.FL PLUG
RG178

Designed by
G.COLEMERE

Checked by
W. CANON

Approved by
N. JAIN

File name
MWAS-2294

TITLE
MWAS-2294

TOLERANCES
DIMENSIONS ARE IN INCHES UNLESS
OTHERWISE SPECIFIED
DECIMALS ANGULAR
.XX ± .02 ± .06
.XXX ± .005
DO NOT SCALE THIS DRAWING

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE
PURPOSES ONLY AND ARE SUBJECT TO CHANGE

REV.
2

Scale
NONE

DATE
112015

Sheet
1 of 1